

6030201 ABSORBER WEBBING LANYARDS

Affordable lanyards constructed from polyester tubular webbing.

Equipped with standard shock absorber (ref. 2029).


CE EN 355

CONSTRUCTION PYLONS/INDUSTRY



Shock Absorber Ref.2029
Maximum extension:
Fall factor 1 = 90cm
Fall factor 2 = 160cm
Maximum peak force:
<6kN (3.5-4.5kN approx.)

Polyester tubular webbing
Width 27mm

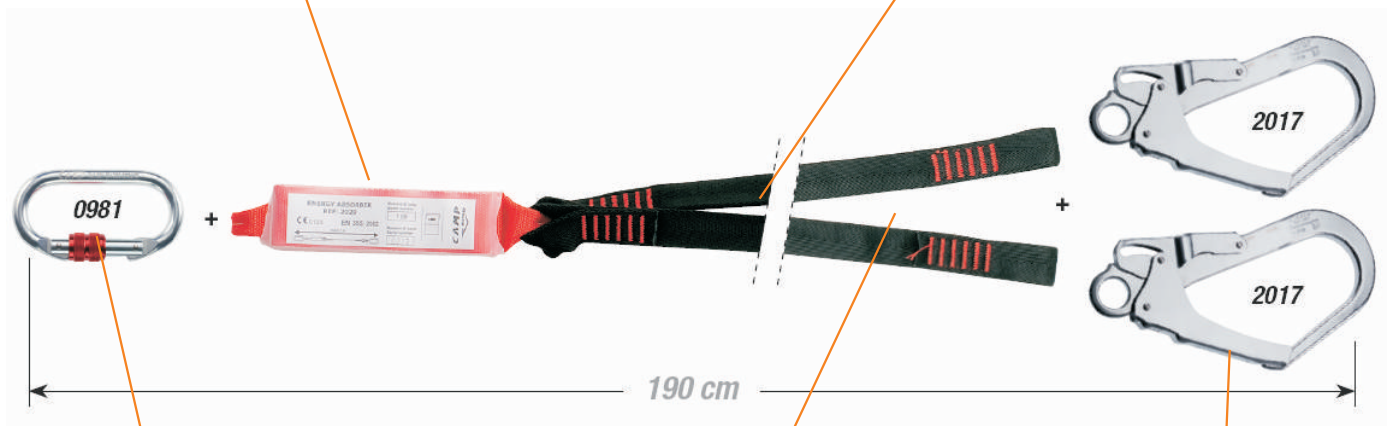

Oval screw connector Ref.0981
Zinc plated carbon steel
Breaking load 28 kN
Opening 16 mm

High strength polyamid stitching
Breaking load 22kN

Safety hook Ref.2017
Zinc plated carbon steel
Breaking load 25kN
Opening 53mm