

## 2810A IRIDIUM 10.5 mm with loops

Iridium 10.5 mm semi-static rope cut to length and terminated with fixed loops with stitching rated to 22 kN at both ends. Loops and stitching are covered with plastic protectors.


CONFINED   
  TOWERS/INDUSTRY   
  ROOFS   
  SELF RESCUE

CE EN 1891 Type A


EAC  
 TP TC  
 019/2011

TECHNICAL SHEET

- 2810A005 5 m
- 2810A010 10 m
- 2810A015 15 m
- 2810A020 20 m
- 2810A030 30 m
- 2810A040 40 m
- 2810A050 50 m
- 2810A060 60 m

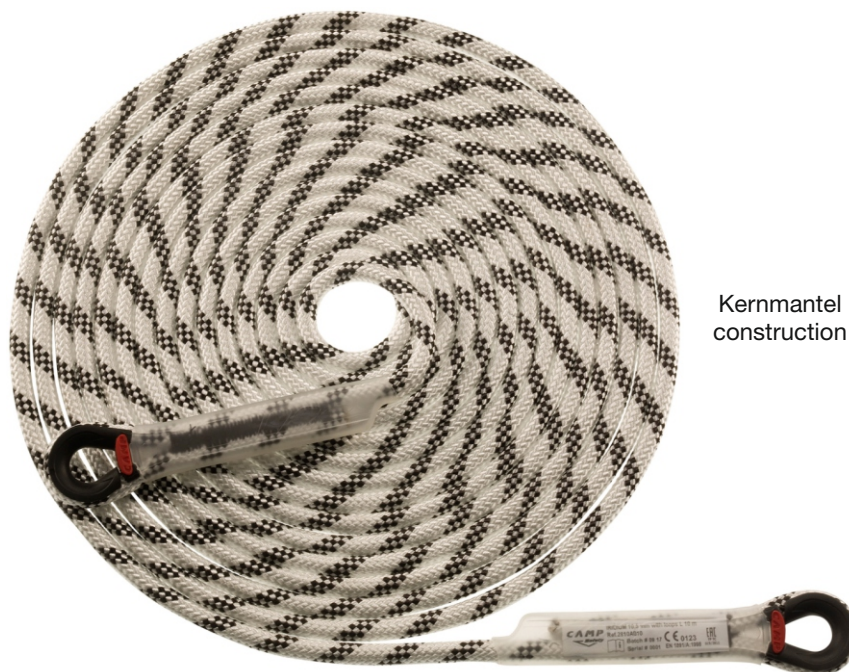

Kernmantel construction

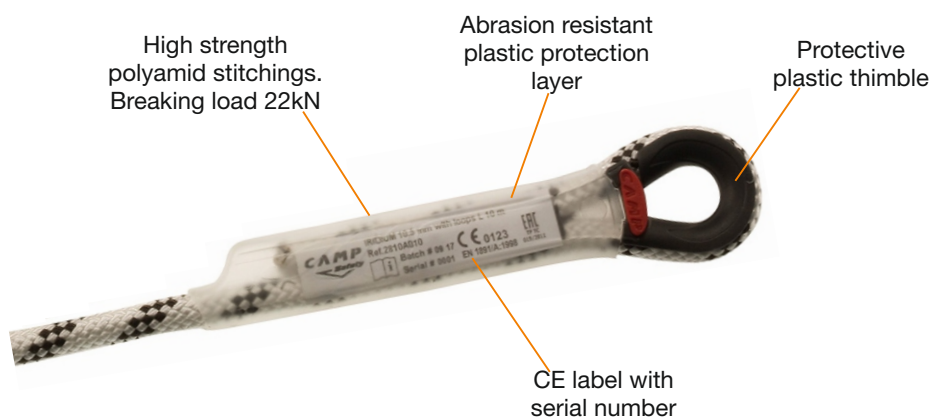

High strength polyamid stitchings. Breaking load 22kN

Abrasion resistant plastic protection layer

Protective plastic thimble

CE label with serial number

Ref.	Product name Nombre del producto	Length Longitudes	Weight Peso		Static strength Resistencia estática kN	Material Material	CE EN 1891	EAC
			g	oz				
2810A005	IRIDIUM 10.5 mm 5 m WITH LOOPS	5 m	430	15.2	22	Polyamide 6 Poliamida 6	A	•
2810A010	IRIDIUM 10.5 mm 10 m WITH LOOPS	10 m	750	26.5				
2810A015	IRIDIUM 10.5 mm 15 m WITH LOOPS	15 m	1080	38.1				
2810A020	IRIDIUM 10.5 mm 20 m WITH LOOPS	20 m	1400	49.4				
2810A030	IRIDIUM 10.5 mm 30 m WITH LOOPS	30 m	2050	72.3				
2810A040	IRIDIUM 10.5 mm 40 m WITH LOOPS	40 m	2700	95.2				
2810A050	IRIDIUM 10.5 mm 50 m WITH LOOPS	50 m	3350	118.2				
2810A060	IRIDIUM 10.5 mm 60 m WITH LOOPS	60 m	4000	141.1				